


### Exit Cube 33042 LED CG-S

- Exit sign cube with LED Technology for large, wide areas, e.g. warehouses or retail areas
- Robust design with impact-resistance of IK07
- Low operating costs via low connected load
- Minimum maintenance effort via use of LEDs with high service life (up to 50,000 hours)
- Modular design of the polycarbonate cube enables simple and safe mounting by just sliding cube onto installed luminaire
- Easy and flexible mounting options with space to ceiling or chain (four mounting eyes existing).
- Optimal perceptibility due to high luminance of the white contrasting colour (> 500 cd/m<sup>2</sup>) acc. DIN 4844-1 / ISO 3864-1 (for bright environments) and high uniformity  $L_{min}/L_{max} > 0,4$  (in mains operation)
- Reduced operating costs due to of especially low power consumption
- Shorten inspection effort due to CEWA GUARD technology
- Automatic function monitoring for up to 20 luminaires per circuit
- Reduced installation cost with STAR Technology
- Freely programmable mixed operation, allowing the switching of luminaire modes within one circuit
- Increased safety through SLI-technology, monitoring of up to 8 individual LEDs in series connection

Exit Cube 33042 LED CG-S



Dimensions in mm

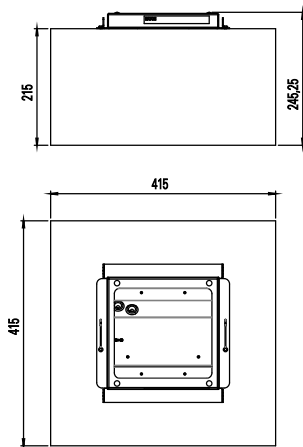

Viewing Distance	40 m
Luminous flux $\Phi_e/\Phi_N$ at the end of rated operating time	100 %
Housing material	Cube: PMMA; enclosure: coated steel sheet
Housing colour	White RAL 9010
Weight	Luminaire 1.6 kg Cube: 3,1 kg
Type of mounting	Ceiling mounting
Connection terminals	Loop terminals 3 x 2.5 mm <sup>2</sup>
Connection voltage	220 – 240 V AC, 50/60 Hz 176 – 275 V DC
Current consumption with battery operating	46 mA
Power consumption mains operation (apparent power / effective power)	17.6 VA / 10.6 W
Inrush current	3 A
Permissible temperature range	-20 °C to +40 °C
Light source	HighPower LEDs 8 x 1 W

Replacement Exit sign cube



### Ordering details

Type	Scope of supply	Order No.
Exit Cube 33042 LED CG-S	Enclosure and exit sign cube, for 40 m viewing distance with LED Supply and CG-S Technology (20 addresses), silkscreened pictograms (arrow left, right, down) acc. to ISO 7010	40071353422



### Ordering details accessories

Type	Scope of supply	Order No.
Replacement Exit sign cube (40 m viewing distance)	silkscreened pictograms (arrow left, right, down) acc. to ISO 7010	40071354451

