

EURO X LED AT

COOPER Safety



- LED self-contained luminaire with automatic test functions: battery operation is tested once weekly and battery capacity twice yearly. Test results are displayed via a dual colour LED.
- Universal use: The luminaire is universally suitable for wall and ceiling mounting and has IP54 protection rating, including pictogram set (arrow right, left and down) acc. to ISO 7010
- 3 h emergency light duration with an environmentally-friendly lithium ion battery
- Supply terminal and cable entries provided for through-wiring 3 x 2.5 mm²
- Maintained and non-maintained operation selectable via a sliding switch
- Low operating costs via low connected load (3.2 W)
- Minimum maintenance effort and increased safety via use of LEDs with high service life (50,000 hours)
- 1 minute switch-back delay after mains return



Ceiling mounting




Wall mounting



Viewing distance	20 m
Rated operation time	3 h
Luminous flux at end of rated operating time	50 %
Housing material	Polycarbonate
Housing colour	White
Type of mounting	Wall mounting, ceiling mounting
Dimension in mm (L x W x H)	230 x 60 x 163
Weight	0.44 kg
Voltage ranges	220 - 240 V, 50/60 Hz
Supply terminals	Plug-in terminal / mains L, N, PE 1.5 - 2.5 mm ²
Power consumption mains operation (apparent power/effective power)	8.9 VA / 4.5 W 7.2 VA / 3.2 W (with completely charged battery)
Light source	5 x LED
Battery	Lithium ion 3.6 V / 2000 mAh with multiple protective circuit
Insulation class	II
Degree of protection	IP54 (designed for installation indoors)
Permissible temperature	Maintained mode -5°C to +30°C Non-maintained mode 0°C to +35°C

Dimension in mm

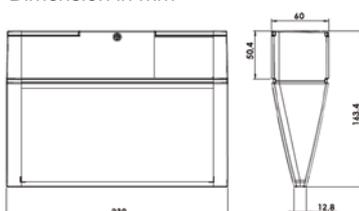

Ordering details

Type	EAN	Order No.
EURO X LED AT	4012539331018	40071354900

Scope of delivery: Luminaire including pictogram set